

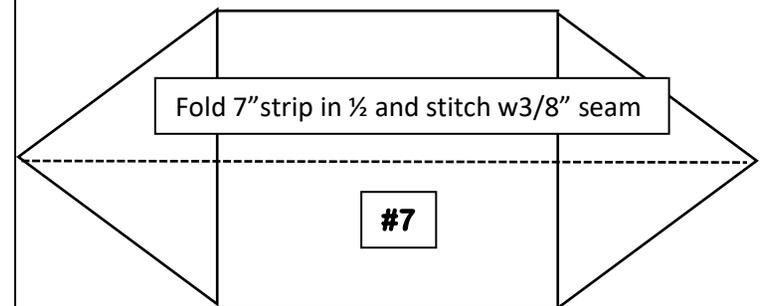
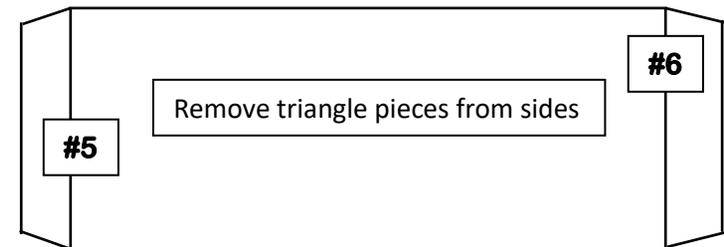
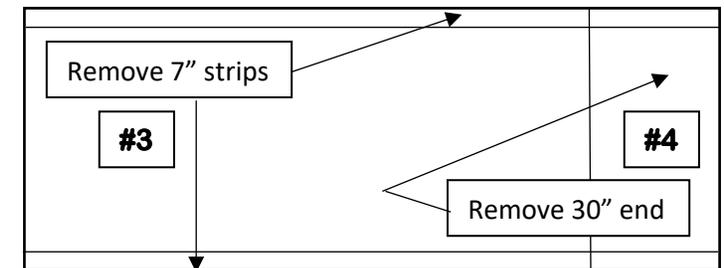


1. Start with 4 yards of Ripstop
2. Cut Ripstop to 132" long by 60" wide. Do not use the selvage. Save material for later.
3. On the Lateral Sides measure 7" down towards middle and mark all along the Lateral Edge. Remove fabric and save for later
4. From the end of the fabric measure towards the middle 30" and remove fabric and save for later.
5. From end, measure in towards the middle 9.5" and mark. This will be the mounting point for the spreader bars.
6. From the ends, from lateral edges measure towards the middle 3.5". Mark and draw line from the 9.5" mark to where the 3.5" meets the end. This triangle piece is to be cut off. Should be four pieces two on each end. See picture.
7. Take the 7" strips and fold in half and sew together at the bottom, leaving a 3/8" seam. This will be the suspension channels.

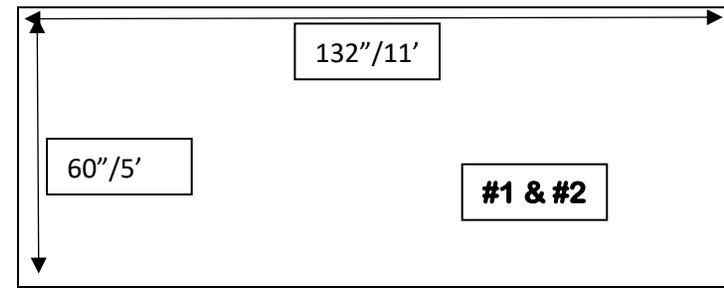

8. Cut 7/64th Dyneema Cord into 2 Length pieces;
 - a. (4) Pieces 49" long (this will be a bit more than needed for extra safety)
 - b. more than needed for extra safety)
 - c. (2) Pieces 118" long (again a bit longer than necessary just in case)
 - d. On all the cut pieces mark 1" from both ends this is the taper
 - i. Unravel ends to reveal strands (8) cut 1 "leg" off each side and one from middle. This thins your bury. See picture.
 - e. On all of the other pieces mark the spots at 7" from end and 8.25" inches from end.
 - i. This will become your eye splice.
 - f. Splice pieces together to create finished 6 pieces. 4 pieces will constitute your end triangles and 2 long pieces for the channeling.
9. Using Xtreckers cat curve generator to create a 7" cat curve along both sides of the hammock body. The cat curve will go from spreader bar to spreader bar.
 - a. Add a 1/4" seam on body before adding channels.

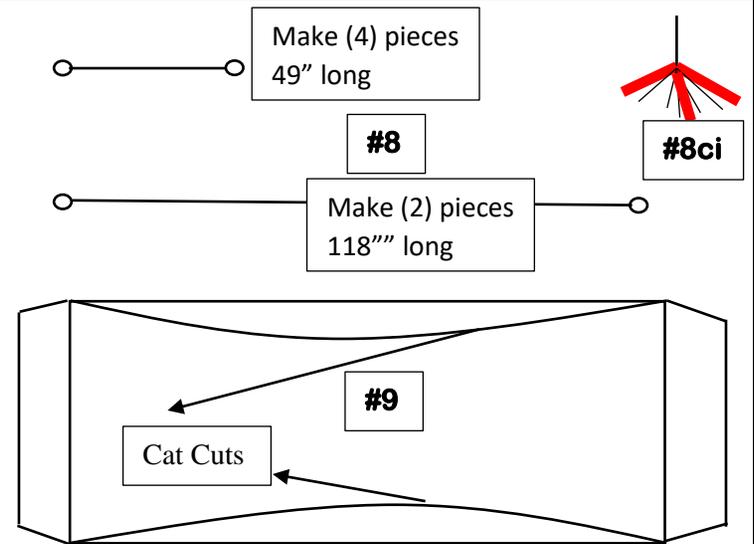

10. Insert the suspension (long pieces) into the channeling you created and sew the channel as close to the top of the channel as you can using a zipper foot. Now sew the 7" strips onto your hammock body using lots of pins to hold in place.
11. Install spreader bars and assemble the suspension and hang. Using your hammock as a guide hang your end cap piece (30" piece you saved) over end and mark shape on left side of fabric making sure to use only one half. Fold fabric in 1/2 and copy shape. This will be your end caps
12. 12 cut end caps and sew onto the hammock body.

